

CPS-B1-5-0101-FR



Performance features

- » Compact SHEV control panel, specifically for stairwells
- » Up to 5 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 2 SHEV operation panels per control panel
- » Min. 72 hr battery backup supply

Accessories

Batteries




SHEV operation panel



Sensor systems



Example of application

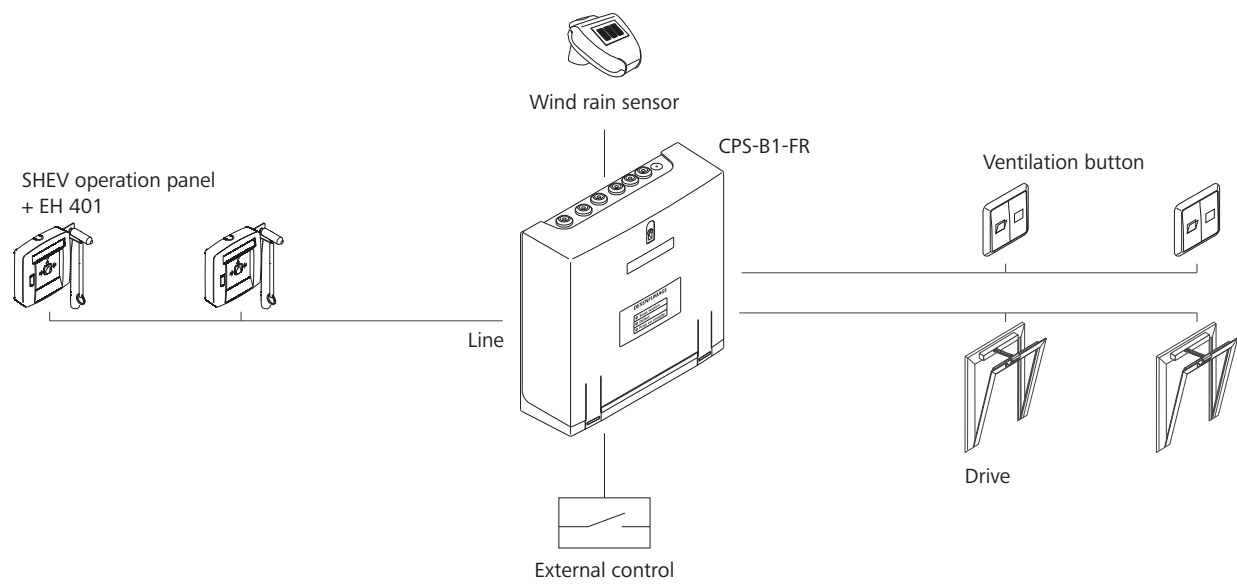

Technical data

	CPS-B1-5-0101-FR
Supply	230 V AC / 50 Hz / 145 VA
Stand-by power	< 2 W / 16 VA
Output	24 V DC / 5 A
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Type of protection	IP 32D
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Housing	Plastic
Colour	White (~ RAL 9016)
Battery type	Typ 8 (2x)

Batteries must be ordered separately.

Approvals / Certificates

Find out about permission details from your D+H Partner.



Design

Type	Art. No.	W x H x D	Weight
CPS-B1-5-0101-FR	30.119.35	310 x 310 x 104 mm	1.92 kg